

KISEONG CABLE



HEAD OFFICE

KISEONG CABLE | FITS CABLE



FITS CABLE

www.kiseong.co.kr | customer@kiseong.co.kr

HEAD OFFICE
219 Jangpyeong-ro, Saha-gu,
Busan, Korea
T. +82-51-203-1451
F. +82-51-203-1455

COIL CENTER
78 Dadae-ro 170gil, Saha-gu
Busan, Korea
T. +82-51-206-1451
F. +82-51-206-1455

VISION CENTER
7 Whajeonsandan, Gangseo-gu
Busan, Korea
T. +82-51-207-1451
F. +82-51-207-1455



FITS CABLE



INNO CENTER / COIL CENTER



www.kiseong.co.kr

OVER 50 YEARS

Korea's No.1 Company in Equipment Cable and Control Cable



Over 50 Years of Green Leadership



Over 50 Years of Premium Quality




Over 50 Years of Harmony




Over 50 Years of Enthusiasm



Over 50 Years of Innovation

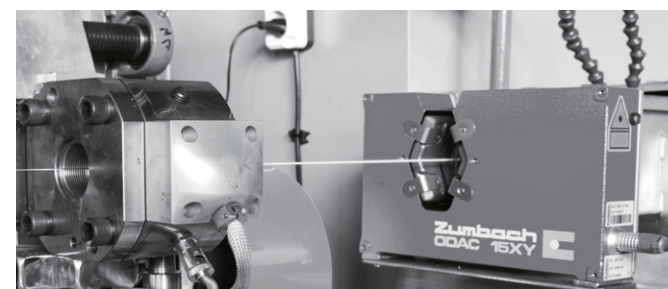

Over 50 Years of Technology

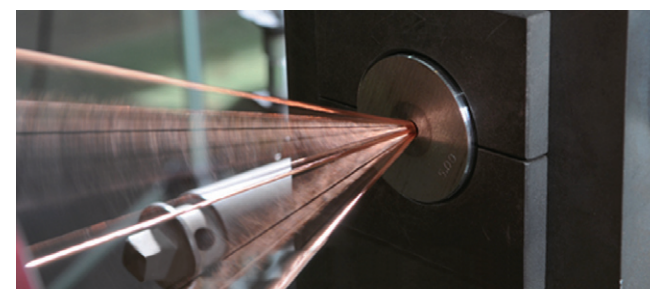


Over 50 Years of Wire & Cable

PREMIUM UTP CABLE

CAT.5E

100 MHz Bandwidth — 1000 BASE-T

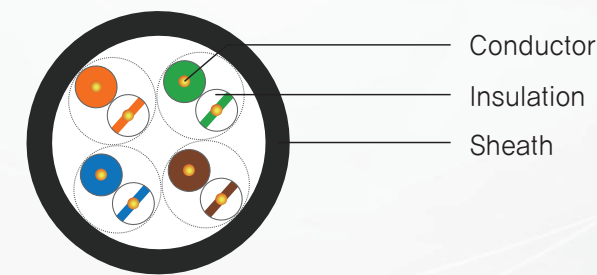


Application	Computer and Electronic Signal Control Cable	Sheath Color	Gray / Blue / Red / Yellow / Black
Conductor	Annealed Copper Wire 24AWG	Temperature Rating	75°C
Insulation	HDPE	Standard	KS C 3342
Sheath	PVC	Packaging	300m, 200m / BOX
Insulation Color	Blue, White / Blue Orange, White / Orange Green, White / Green Brown, White / Brown	Applications	Outdoor horizontal wiring (100MHz) 155Mbps ATM / IEEE 802.3, 802.5 Token Ring 16Mbps, Data rate 16Mbps 100 Base-VG, -T4, -X, etc

PREMIUM UTP CABLE

CAT.6

250 MHz Bandwidth — 1000 BASE-T

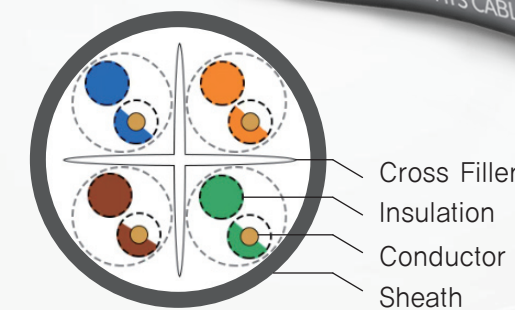

Application	Computer and Electronic Signal Control Cable	Sheath Color	Gray / Blue / Red / Yellow / Black
Conductor	Annealed Copper Wire 24AWG	Temperature Rating	75°C
Insulation	HDPE	Standard	KS C 3342
Sheath	PVC	Packaging	300m / BOX
Insulation Color	Blue, White / Blue Orange, White / Orange Green, White / Green Brown, White / Brown	Applications	General Use (250MHz) 155Mbps ATM / IEEE 802.3, 802.5 Token Ring 16Mbps, Data rate 16Mbps 100 Base-VG, -T4, -X, etc

PREMIUM UTP CABLE

CAT.7

600 MHz Bandwidth — 10G BASE-T



Application	Computer and Electronic Signal Control Cable	Sheath Color	Gray / Blue / Red / Yellow / Black
Conductor	Annealed Copper Wire 23AWG	Temperature Rating	75°C
Insulation	HDPE	Standard	Based on KS C 3342, ISO/IEC 11801 Class F
Sheath	PVC	Packaging	200m / BOX
Insulation Color	Blue, White / Blue Orange, White / Orange Green, White / Green Brown, White / Brown	Applications	General Use (600MHz) 155Mbps ATM / IEEE 802.3, 802.5 Token Ring 16Mbps, Data rate 16Mbps 100 Base-VG, -T4, -X, etc